
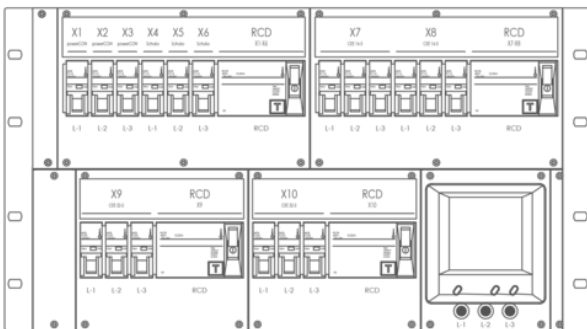


# POWER RACK XTREME CPRX63-C2-C4T3F3- RBM

On request modification.

**IN:** Input cable 2m 1x CEE63A, **OUT:** 1x CEE63A, 2x CEE32A, 2x CEE16A, 3x powerCON TRUE1, 3x Schuko Type F.

Power Rack Xtreme is a powerful and highly reliable distribution solution for installation in the 19" Rack. It is ideally suited for amplifier rack wiring application.

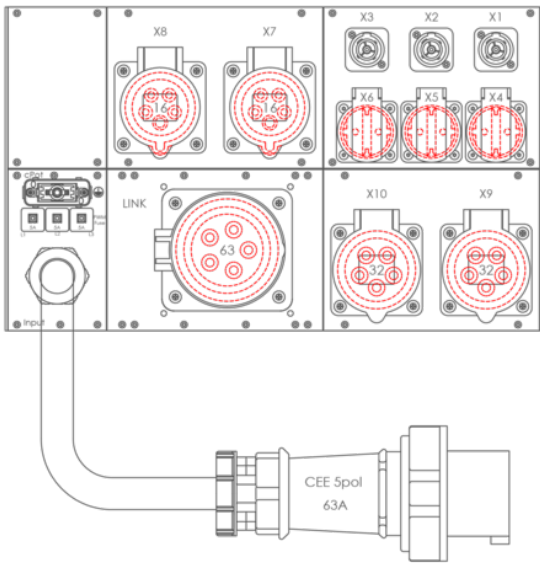

## Features & Benefits

- High quality electrical and electronical component from the renowned brands
- Circuit protection with residual current device (RCCB) and miniature circuit breakers (MCB)
- High quality assembly in EU
- Attractive price / value ratio

## Markets & Applications

- Markets: Professional audio esp. amp rack wiring / lighting / video wall
- Mobile applications: Festivals, live events. Control panels / rooms.
- Semi-permanent applications: Theaters, studios, fairs. Control panels /rooms.

## Ordering information

Article name	Details	Order code
CPRX63-C2-C4T3F3-RBM	Front: 18x MCB (1-pole), 4x RCCB (3-pole + N), Back: IN: 1x Input cable 2m, 1x CEE63A, OUT: 1 x CEE63A, 2x CEE32A, 2 x CEE16A, 3x powerCON TRUE1, 3x Schuko Type F.	1038250

## Technical Information

Product	
<b>Input device</b>	IN: 1x Input cable 2m 1x CEE63A
<b>Daisy chain</b>	1x CEE63A (-)
<b>Output device</b>	2x CEE32A (6x MCB 1P, 2x RCCB 40A 3P+N) 2x CEE16A (6x MCB 1P, 1x RCCB 40A 3P+N) 3x powerCON TRUE1 and 3 x Schuko Type F (6x MCB 1P, 1x RCCB 40A 3P+N) 1x cPot
<b>Main switch</b>	
<b>Power meter</b>	Selec MFM 384

Electrical	
<b>Phase control indicator</b>	
<b>Rated voltage</b>	400V
<b>Rated Current</b>	63A

Mechanical	
<b>Weight</b>	
<b>Type of construction</b>	19" Housing 6 HE

Material	
<b>Housing</b>	Metal
<b>Color</b>	Black

## Environmental

<b>Protection class</b>	IP20
<b>Temperature range</b>	-5 to +40°C